

NEW

STARCKE®

Genuine STARCKE. Since 1829.

062XP
High performance ceramic



BELT AND DISC SANDING




ARTICLE NO. 062 XP

Backing	Very heavy X-weight polyester cloth
Bonding	Resin over resin
Grain type	Ceramic + Aluminium oxide
Grits	36, 40, 50, 60, 80, 100
Dimension	200 x 750 mm, 250 x 750 mm, 300 x 750 mm, 200 x 480 mm, 200 x 551 mm 8" x 19", 8" x 22", 7 7/8" x 29 1/2", 10" x 29 1/2", 12" x 29 1/2", 7 7/8" x 29 1/2" Diameter 6", 7"

Areas of application: New flooring / old floor refinishing

Suitable for: Hardwood

- Benefits
- High stock removal
 - Long service life
 - High class surface

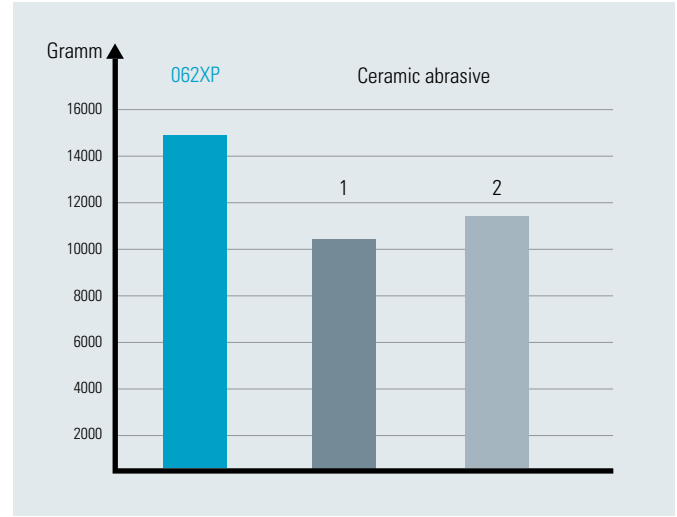

Highest stock removal in test (Source: Internal test)

CERAMIC FINISH PAR EXCELLENCE



- High-performance ceramic abrasive grain ensures high stock removal rates
- Long service life due to an semi open grain coat
- Achieving high class surfaces by precisely coated abrasive grain

STARCKE GmbH & Co. KG
Markt 10
D-49324 Melle
Telefon + 49 (0) 54 22 966-0
Telefax + 49 (0) 54 22 966-301
info@starcke.de
www.starcke.de

STARCKE Abrasives UK LTD.
Unit T4, Capital Business Park
Parkway, Rumney
CF3 2PZ Cardiff
Great Britain
Telephone + 44 2920 777534
Telefax + 49 2920 363414
info@starckeuk.com
www.starckeuk.com

STARCKE Abrasives USA, Inc.
9109 Forsyth Park Drive
Charlotte, NC 28273
Telephone + 1 (866) 742-6683
Fax + 1 (877) 504-1204
sales@starckeusa.com
www.starckeusa.com