


## Product Information 341X - Metal

### Product structure

<b>Backing</b>	Heavy X-weight cotton cloth	
<b>Flexibility</b>		
<b>Grain Type</b>	Zirconia aluminium oxide + aluminium oxide	
<b>Coating</b>	closed	
<b>Top Coat</b>	<input type="checkbox"/> stearate <input type="checkbox"/> special top coat	
<b>Manufactured Width</b>	<input type="checkbox"/> 1400mm <input type="checkbox"/> 1430mm <input checked="" type="checkbox"/> 1650mm <input type="checkbox"/> others	
<b>Form</b>		
<b>Suitable for</b>	<input type="checkbox"/> hand sanding <input checked="" type="checkbox"/> hand held machine sanding <input checked="" type="checkbox"/> machine sanding	

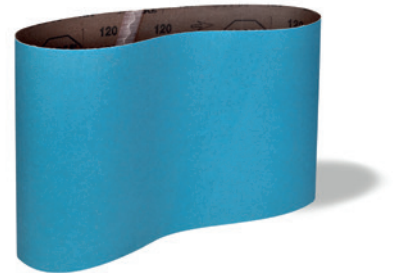

### Grits

Ceramic, zirconia, # and \* = non P-Grits

<input type="checkbox"/> P 12	<input type="checkbox"/> P 16	<input checked="" type="checkbox"/> 24	<input type="checkbox"/> P 30	<input checked="" type="checkbox"/> 36	<input checked="" type="checkbox"/> 40	<input type="checkbox"/> P 50	<input checked="" type="checkbox"/> 60	<input checked="" type="checkbox"/> 80	<input checked="" type="checkbox"/> 100	<input checked="" type="checkbox"/> 120	<input type="checkbox"/> P 150	<input type="checkbox"/> P 180	<input type="checkbox"/> P 220	<input type="checkbox"/> P 240
<input type="checkbox"/> P 280	<input type="checkbox"/> P 320	<input type="checkbox"/> P 360	<input type="checkbox"/> P 400	<input type="checkbox"/> P 500	<input type="checkbox"/> P 600	<input type="checkbox"/> P 800	<input type="checkbox"/> P 1.000	<input type="checkbox"/> P 1.200	<input type="checkbox"/> P 1.500	<input type="checkbox"/> P 2.000	<input type="checkbox"/> P 2.500	<input type="checkbox"/> ST 3.000	<input type="checkbox"/> ST 6.000	<input type="checkbox"/> ST 8.000

### Materials

Aluminium	Non-ferrous Metal	Stainless steel	<b>Steel</b>	Titanium	Paint lacquer	Glass	Wood	Plastics	Stone/china
-----------	-------------------	-----------------	--------------	----------	---------------	-------	------	----------	-------------

### Application examples



Deburring



Aluminium castings



Steel sheet and welding seams

- Optimised combination of zirconia and aluminium oxide for sharp grinding
- Strong x-weight cotton backing for a high strength and long belt life
- As strong grip velcro disc for achieving best performances on metal working with angle grinder and orbital sander

