


Product Information

641X - T01

Product structure

Backing	Heavy X-weight cotton cloth
Flexibility	
Grain Type	Aluminium oxide
Coating	closed
Top Coat	<input type="checkbox"/> stearate <input type="checkbox"/> special top coat
Manufactured Width	<input type="checkbox"/> 1400 mm <input type="checkbox"/> 1430 mm <input checked="" type="checkbox"/> 1650 mm <input type="checkbox"/> others
Form	
Suitable for	<input type="checkbox"/> Hand sanding <input type="checkbox"/> Hand-held machine sanding <input checked="" type="checkbox"/> Machine sanding



Grits

Bei Keramik, Zirkon, # und * keine P-Körnung

<input type="checkbox"/> P 12	<input type="checkbox"/> P 16	<input type="checkbox"/> P 24	<input type="checkbox"/> P 30	<input type="checkbox"/> P 36	<input checked="" type="checkbox"/> P 40	<input checked="" type="checkbox"/> P 50	<input checked="" type="checkbox"/> P 60	<input checked="" type="checkbox"/> P 80	<input checked="" type="checkbox"/> P 100	<input checked="" type="checkbox"/> P 120	<input type="checkbox"/> P 150	<input type="checkbox"/> P 180	<input type="checkbox"/> P 220	<input type="checkbox"/> P 240
<input type="checkbox"/> P 280	<input type="checkbox"/> P 320	<input type="checkbox"/> P 360	<input type="checkbox"/> P 400	<input type="checkbox"/> P 500	<input type="checkbox"/> P 600	<input type="checkbox"/> P 800	<input type="checkbox"/> P 1.000	<input type="checkbox"/> P 1.200	<input type="checkbox"/> P 1.500	<input type="checkbox"/> P 2.000	<input type="checkbox"/> P 2.500	<input type="checkbox"/> ST 3.000*	<input type="checkbox"/> ST 5.000*	<input type="checkbox"/> ST 7.000*

Materials

Aluminium	Non-ferrous metal	Stainless steel	Steel	Titanium	Paint lacquer	Glass	Wood	Plastics	Stone/china
-----------	-------------------	-----------------	-------	----------	---------------	-------	-------------	----------	-------------


Application examples



Parquet - Pre- Intermediate- and Finish sanding



Belt sander

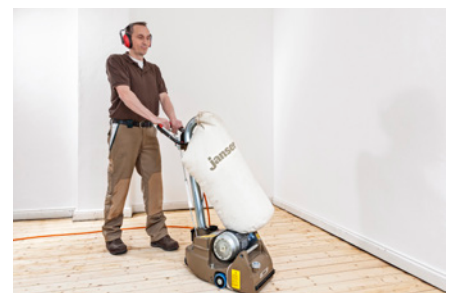

Sleeve sander

- Intensive sanding and high stock removal due to heavy X-weight cotton cloth backing and special flexing
- High material removal due to sharp and resistant aluminium oxide grain
- High-grade surfaces due to precisely coated abrasive grain

