

# Product Information

## 943 F

### Product structure

<b>Backing</b>	Durable F-weight paper
<b>Flexibility</b>	
<b>Grain Type</b>	Silicon carbide
<b>Coating</b>	very open coat
<b>Top Coat</b>	<input type="checkbox"/> stearate <input type="checkbox"/> special top coat
<b>Manufactured Width</b>	<input type="checkbox"/> 1400mm <input type="checkbox"/> 1430mm <input checked="" type="checkbox"/> 1650mm <input type="checkbox"/> others
<b>Form</b>	
<b>Suitable for</b>	<input type="checkbox"/> Hand sanding <input checked="" type="checkbox"/> Hand-held machine sanding <input checked="" type="checkbox"/> Machine sanding



### Grits


Ceramic, zirconia, # and \* = non P-Grits

<input type="checkbox"/> P 12	<input checked="" type="checkbox"/> P 16	<input checked="" type="checkbox"/> P 24	<input type="checkbox"/> P 30	<input type="checkbox"/> P 36	<input type="checkbox"/> P 40	<input type="checkbox"/> P 50	<input type="checkbox"/> P 60	<input type="checkbox"/> P 80	<input type="checkbox"/> P 100	<input type="checkbox"/> P 120	<input type="checkbox"/> P 150	<input type="checkbox"/> P 180	<input type="checkbox"/> P 220	<input type="checkbox"/> P 240
<input type="checkbox"/> P 280	<input type="checkbox"/> P 320	<input type="checkbox"/> P 360	<input type="checkbox"/> P 400	<input type="checkbox"/> P 500	<input type="checkbox"/> P 600	<input type="checkbox"/> P 800	<input type="checkbox"/> P 1.000	<input type="checkbox"/> P 1.200	<input type="checkbox"/> P 1.500	<input type="checkbox"/> P 2.000	<input type="checkbox"/> P 2.500	<input type="checkbox"/> ST 3.000	<input type="checkbox"/> ST 6.000	<input type="checkbox"/> ST 8.000

### Materials

Aluminium	Non-ferrous Metal	Stainless steel	Steel	Titanium	Paint lacquer	Glass	Wood	Plastics	Stone/china
-----------	-------------------	-----------------	-------	----------	---------------	-------	------	----------	-------------


### Application examples

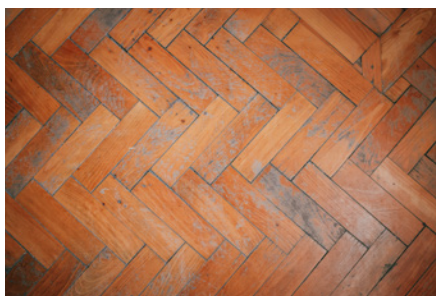

Parquet | Removing of old coatings



Screed floor | Sizing

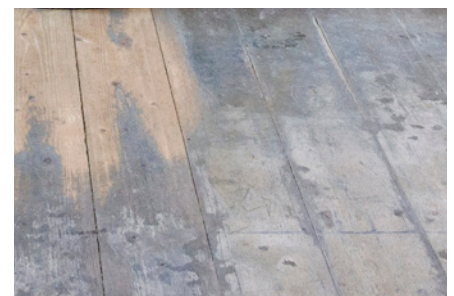

Floor boards | Removing of old floor-paint coatings

- Even for high pressure sanding applications due to durable F-weight paper backing
- High stock removal rates when sanding old abrasion-resistant floor coatings and sizing of screed floors due to excellent self-sharpening silicon carbide grain
- Long service life when sanding old floor-paint coatings due to very open grain coat

