

Product Information

PEARL GRINDING

A44X

Product structure

Backing Sturdy X-weight cotton cloth


Flexibility low 1 5 10 high

Grain Type Pearl Grinding - Aluminium oxide

Coating Open

Top Coat stearate special top coat

Manufactured Width 1400mm 1430mm 1650mm others

Form 

Suitable for hand sanding hand held machine sanding machine grinding



Grits

Ceramic, zirconia, # and * = non P-Grits

P 12 P 16 P 24 P 30 36 40 50 60 80 100 120 P 150 P 180 P 220 P 240
 P 280 P 320 P 360 P 400 P 500 P 600 P 800 P 1.000 P 1.200 P 1.500 P 2.000 P 2.500 ST 3.000 ST 6.000 ST 8.000


Materials

Aluminium Non-ferrous Metal Stainless steel Steel Titanium Paint lacquer Glass Wood Plastics Stone/china


Application examples



Centerless grinding of round piping

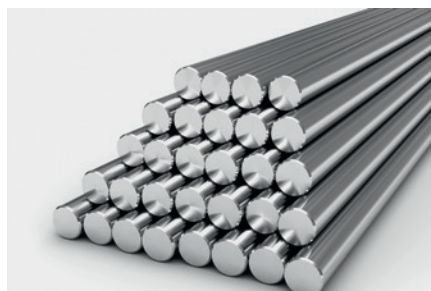

Round steel and flat rolled steel processing

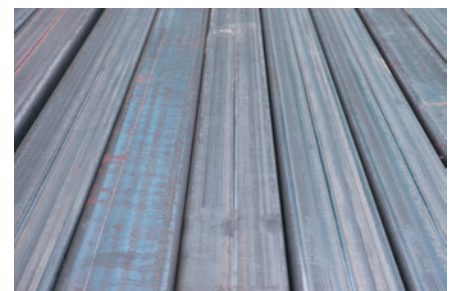

Welding seam processing of rectangular round and tubing

- Very long belt life due to large amount of grain
- Consistent stock removal due to the modified PEARL GRINDING grain bond
- Less surface roughness from start to finish thanks to the specific PEARL GRINDING grain ball structure

